


(19)  **Europäisches Patentamt**  
**European Patent Office**  
**Office européen des brevets**



(11) **EP 1 134 995 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
 19.09.2001 Bulletin 2001/38

(51) Int Cl.7: **H04Q 7/38**

(21) Application number: **00105747.0**

(22) Date of filing: **17.03.2000**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU**  
**MC NL PT SE**  
 Designated Extension States:  
**AL LT LV MK RO SI**


(72) Inventor: **Martin de Nicolas, Arturo**  
**52066 Aachen (DE)**

(74) Representative: **Mohsler, Gabriele**  
**Ericsson Eurolab Deutschland GmbH,**  
**Research Department,**  
**Ericsson Allee 1**  
**52134 Herzogenrath (DE)**

(71) Applicant: **TELEFONAKTIEBOLAGET LM**  
**ERICSSON**  
**126 25 Stockholm (SE)**

(54) **Method and devices for improved location updating in a mobile communication system**

(57) A method for a location update in a mobile communication system with a home location register (HL) and visitor location registers (VL) is described. The visitor location registers (VL) serve different parts of the area covered by the communication system and the home location register (HL) holds a data record assigned to a user, the data record comprising parameters for the establishment of connections with the user and an identification of the visitor location register (VL) presently serving the user. Parameters from the record can be copied from the home location register (HL) to the visitor location register (VL) serving the user. In the method it is detected that a user has entered the area served by a visitor location register (VL) and a location update message (18) is sent which indicates the identity of the visitor location register (VL) to the home location register (HL) and stored in the data record for the user. When the establishment of a connection with the user is requested, parameters from the data record in the home location register (HL) are sent to the serving visitor location register (VL) during the establishment of the connection. Location registers and programs embodying the invention are also described.

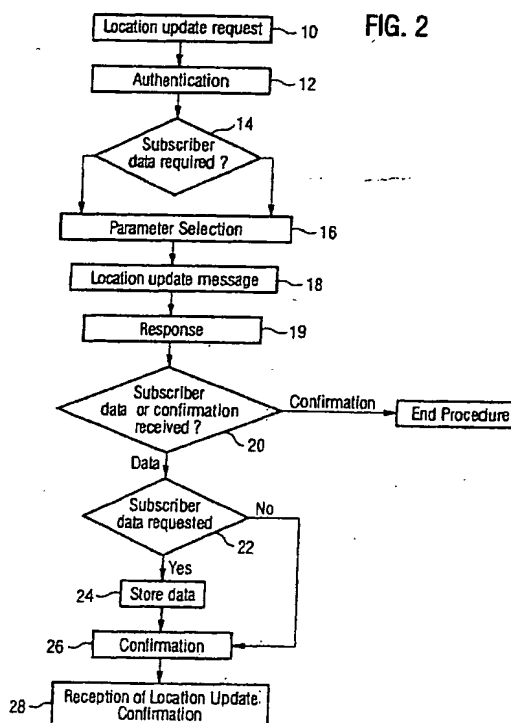

EP 1 134 995 A1

2

## Description

## Technical field of the invention

[0001] The present invention relates to a method according to the preamble of claim 1. Location registers and programs embodying the invention are also described.

## Background

[0002] For every subscriber of a customary mobile communication system, a data record is stored in a data base denoted as home location register (HLR). Data records of different subscribers can be located in different home location registers. The data records comprise parameters which are used by control nodes in the communication system for the establishment of connections with user equipment of the subscriber. Connections can be established from the user equipment (user originating connection) or to the user equipment (user terminating connection). A connection can be for example a data connection, a speech call, an SMS (Short Message Service) message or the activation, deactivation or interrogation of a supplementary service like activating a call forwarding to a different subscriber number.

[0003] To reduce the signaling load during call set up and avoid high local computational loads, many communication systems comprise also visitor location registers (VLR). A VLR also contains sets with subscription related parameters for processing connections of the users served, generally those users located in a limited part of the area covered by the communication system. In most cases, the VLR is collocated with or part of the control node processing connections for the users served by the VLR, e.g. a mobile switching center (MSC). The VLR serves users by providing parameters for connections so that the connections can be processed by the control node serving the user without the necessity to contact the HLR.

[0004] Subscription related parameters which are used to process connections can be transferred by messages from the subscriber record in the HLR to the serving VLR. It is possible to copy all or a selection of the parameters as the parameters stored in the VLR can vary according to the capabilities of the VLR and the control node serving the corresponding area. The parameters specify, for example, services that are provided to the user equipment or parameters which are used in connections. According to GSM (Global System for Mobile Communications) specification 9.02 and UMTS (Universal Mobile Telecommunication System) 3G Technical Specification 29.002, V3.2.0 of the 3rd Generation Partnership Project, subscriber data is sent from the HLR to the VLR with the MAP (Mobil Application Part) message "Insert Subscriber Data" in response to the message "Update Location" from the VLR. The latter provides the HLR with the present location of the user

equipment. The "Update Location" message is generated by the VLR when the user equipment enters the region served. Especially for the case of a failure in a location register, subscriber data can also be requested with the message "Send Parameters" to update damaged, incomplete or missing subscriber records.

[0005] For locating user equipment within the communication system and routing connections to its present location, an identification of the visitor location register serving the user equipment is stored in the home location register. Users can enter the service area of a VLR by moving connected or idle equipment into the area from an area served by another VLR or by switching on the user equipment in the area served. If the presence of a new user equipment is detected in the service area of a VLR, a location update is performed for the subscriber. In a location update, the HLR is notified of the serving VLR which receives in return subscription related parameters from the subscriber record. For setting up a user terminating connection from a first control node, the node identifies the corresponding home location register from the subscriber number. Preferably, the HLR requests a temporary mobile subscriber roaming number from the control node presently serving the user equipment and forwards it to the first control node for setting up the connection. Alternatively, it is conceivable that the home location register provides the identity of the control node or VLR presently serving the subscriber to the first control node.

[0006] A location update causes processor load both in the new VLR and in the HLR to which the user equipment is assigned and generally also in a former VLR if a location cancellation is performed there. If the subscriber does not set up or receive a connection during his presence in the respective area, the location update does not provide any benefit for the operator of the communication system. In many cases, location updates without any subsequent connection by the user equipment in the respective area represent a considerable percentage of all location updates performed. An example for this situation is a densely populated area served by two or more VLRs where users frequently commute between the service areas. Another example are operators with a high percentage of subscribers who set up few connections which is a common behavior for subscribers with prepaid subscriptions.

[0007] If a restart of a VLR occurs, e.g. after a failure, stored data of some or all served users can be totally or partially lost or corrupted. In this case, the operation of the VLR is blocked for a considerable time by updating the parameter sets for the respective users in the VLR. During this interval of time, the communication system cannot be accessed by users in the area served by the VLR.

## Summary of the invention

[0008] It is an object of the present invention to obvi-

3

EP 1 134 995 A1

4

ate the above disadvantages and reduce the processing load in a location register for location updating of idle user equipment. It is a further object, to reduce the time necessary for a restart of a visitor location register.

[0009] According to the invention, the method described in claim 1 is performed. Furthermore, the invention is embodied in devices and software programs as described in claims 11, 18, 20 and 21. Advantageous embodiments are described in the dependent claims.

[0010] In the proposed method, a location update is initiated by the detection that a user has entered the area served by a visitor location register. The service area of a VLR can be entered by moving user equipment into the area or by switching on user equipment which is already located in the respective area. The communication system can detect the presence of the user equipment in the corresponding area for example from a notification, e. g. a location update request, which is sent by the user equipment to the system. Customary user equipment sends a location update request when it moves into a new cell or location area, after it is switched on or periodically. Generally, the notification identifies the subscriber and is sent to the control node (e.g. an MSC) serving the respective area. When the system receives the notification, a check is performed whether the user equipment is already registered in the respective VLR and the position of the user equipment within the service area of the VLR is preferably stored, e.g. the location area which is a cell or group of cells in which the user equipment is presently located.

[0011] The notification can be supplemented by an authentication procedure of the user equipment to check whether the user is authorized to have a connection with the communication system, i.e. to avoid improper accesses. Parameters for the authentication procedure, e.g. authentication multipliers, are preferably provided to the control node from the visitor location register serving the area which in turn can obtain them from the home location register of the subscriber or from the visitor location register which served the subscriber before.

[0012] When a visitor location register detects user equipment that has entered its service area, a location update message is sent to the home location register of the subscriber, i.e. the HLR which comprises the data record for the user equipment. The location update message indicates the identity of the visitor location register and can be sent by the visitor location register presently serving the user equipment or the control node receiving the notification from the user equipment, preferably both integrated in a single device. The identity of the VLR is stored in the subscriber data record in the HLR in order to allow the routing of connections from other users of the communication system to the user equipment. Preferably, the successful execution of this procedure is confirmed by the home location register. Else, a retransmission of the location update message can be performed after a predefined period. A message to cancel

the entry in the visitor location register which served the user equipment before the location update can be sent by the home location register. The above steps of the location updating procedure are repeated every time the service area of a VLR is entered and may be repeated several times before the establishment of a connection with the user equipment.

[0013] A transmission of parameters from the data record in the home location register to the visitor location register is performed after the communication system, i.e. any node in the system, receives a request to establish a connection with the user equipment, e.g. a call. Preferably, the parameters are transmitted during the establishment of the connection by the communication system. The further processing of the connection request is preferably suspended until the VLR receives the parameters. As the transmission and storing of the parameters requires comparatively large resources in the system, optionally a further authentication of the user equipment is performed before the transmission of the parameters. The transmission can for example be requested by the VLR in a message to the home location register. Often, a further node in the communication system receives the service request before the serving VLR, especially for a user terminating connection. In such cases, parameters can be sent without a request from the VLR, e.g. by the HLR when it is contacted by a further control node to provide a roaming number for the subscriber.

[0014] Preferably a check is performed whether the parameters necessary for the processing of the connection are already present in the visitor location register, e.g. because they were sent to the visitor location register for an earlier connection, and a transmission is only performed if the parameters are not present or the record in the HLR has changed. Finally the connection is established or rejected by the serving control node according to the parameters from the subscriber record.

[0015] In contrast to the state of the art, the method of the invention proposes to send parameters from the home location register to the visitor location register during the establishment of the first connection with the user equipment while being served by the respective VLR. In this way, unnecessary transmissions of parameters are avoided for user equipment which does not establish a connection in the area served by a visitor location register. With increasing ratio of location updates to connections, the processor load both in the home and the visitor location registers decreases significantly. The ratio is, for example, often high if the area served by a visitor location register is small as in densely populated regions or if a high percentage of users establishes only few connections. Furthermore, the time for the restart of a visitor location register and consequently the time in which requests to process a connection are not fulfilled is significantly reduced because a transmission of parameters from the home location register is only necessary for users who establish a connection. The amount

5

EP 1 134 995 A1

6

of signaling generated in the communication system and the memory necessary for storing parameters in the VLR are also reduced. Finally, the integrity of the data is improved as the transfer is performed during the set up of the connections.

[0016] In a preferable embodiment of the method, the location update message comprises an indicator whether parameters from the data record are requested. In the reply to the location update message, an advantageous home location register sends parameters from the data record according to the setting of the indicator. Preferably, the indicator is a boolean parameter to minimize the length of the location update message. The indicator should be optional to allow a processing of the location update message by home location registers which are not adapted to the proposed method. The indicator is preferably set according to the processor load in the VLR. Also the current traffic profile is preferably considered, i.e. the ratio of connection requests to location updates for users entering the service area. For example, parameters are requested if the ratio and the processor load are below respective thresholds which can be specified by the operator. Other conditions can also be considered for setting the indicator, e.g. the time of the day to avoid high signaling traffic during peak loads of the system. It is proposed that the conditions for setting the indicator are not evaluated for every location update procedure but periodically for a certain interval of time and the same indicator is used for all location update messages in the interval. It is alternatively possible that an operator specifies the indicator for a period of time, e.g. to accelerate a restart of a VLR.

[0017] A visitor location register can preferably discard, i.e. not store, parameters from the data record which are sent in reply to a location update message, especially if parameters are sent without request. The latter case occurs if a home location register is not adapted to the proposed method and sends parameters regardless of the indicator setting. The processor load in the visitor location register for discarding the parameters and an additional retransmission of the parameters for a connection is increased compared to the state of the art. However, the processor load for an average location update is significantly reduced if the percentage of users without connections in the area served by the VLR is high.

[0018] In an advantageous method, the visitor location register performs a decision whether parameters received in reply to a location update message are stored. Preferably, the result of the decision for setting the indicator is stored for this purpose and the parameters are stored or discarded accordingly. Alternatively, a new decision analogous to the first one is performed, e.g. according to the processor load and traffic profile in the VLR wherein parameters are discarded if the load under a specific profile exceeds a threshold. It is possible that different thresholds exist for requesting parameters from the home location register and for storing param-

eters which are sent from the HLR to the VLR. The decision can also be performed according to other conditions, e.g. according to the time of the day.

[0019] An operator can suspend the decision or specify the same result for all decisions, e.g. by setting a threshold to zero or infinity for a period of time.

[0020] In order to avoid a retransmission of the parameters from the home location register, it is proposed that a visitor location register confirms the successful reception of parameters which are discarded. Especially, the interworking with home location registers which are not adapted to the method of the invention is simplified in this way.

[0021] Different possibilities exist for the transfer of the parameters from the data record in the HLR to the visitor location register during the set up of a connection. In a simple embodiment of the invention, the visitor location register sends a message to transfer the parameters. In communication systems according to GSM or UMTS specifications, the MAP message "Send Parameters" is suitable for this purpose.

[0022] Alternatively, parameters can be requested by the VLR with a further update location message. The update location message comprises an indicator that parameters from the data record are requested or a location update message without indicator, i.e. as used in the state of the art, can be sent. As this further update location message is not initiated by the user equipment, it does not require transmissions to and from the user equipment, e.g. over the A interface according to GSM specifications or the lu interface according to UMTS specifications. Therefore, the processor load is smaller than for a location update procedure initiated by user equipment.

[0023] To simplify and accelerate the establishment of a connection, a decision can be performed whether parameters from the data record in the HLR are necessary and requested before the establishment. For a user terminating connection, often only the party initiating the connection is charged. Parameters can, therefore, optionally be requested only for connections for which the subscriber is charged, e.g. user originating connections, or for which different connection parameters are accessible with different subscriptions.

[0024] For the set up of a user terminating connection, the home location register is contacted to provide the user location, generally as a roaming number for the terminating user equipment. Therefore, parameters from the data record can be included by the HLR in a message which requests the roaming number from the VLR. This embodiment avoids an increase in the time to set up the connection by additional messages between HLR and VLR. Preferably, the HLR performs a check whether the parameters have to be sent with the request to provide the roaming number. For this purpose, the subscriber record in the HLR can comprise an indicator whether the parameters were requested or sent since the last location update.

7

EP 1 134 995 A1

8

[0025] Location registers for mobile communication systems comprise a memory or data base with user related parameters and a processing system for accessing and managing the contents of the data base. All procedures executed by a VLR or an HLR as described below can be executed by function units in the respective location register. Preferably, the units are embodied as software units which are executed in the processing system of the location register.

[0026] A VLR for serving an area in a mobile communication system has an interface to receive messages from user equipment located in the area served and an interface for accessing a home location register with a data record assigned to the user equipment. The interfaces can be identical or part of a single input/output unit in the VLR itself or in a control node integrated with the VLR. Messages between the VLR and an HLR or between the VLR and user equipment will generally be relayed by other nodes in the communication system. The visitor location register detects from the comparison of received messages and stored data that user equipment has entered the area served. Preferably, location update requests received from user equipment are checked whether the user is already registered in the VLR. If a user is detected who has entered the service area, the VLR sends a location update message indicating the identities of the detected user equipment and the visitor location register to the HLR of the user.

[0027] Parameters can be copied from the subscriber data record in the HLR to the visitor location register. A visitor location register according to the invention initiates the transmission of parameters from the data record in the home location register when the establishment of a connection between the system and the user equipment is requested.

[0028] It is proposed that a VLR comprises a unit to perform a decision whether the transfer of parameters from the data record is initiated during the establishment of a connection. The unit preferably checks whether parameters are already present in the data base of the register or if the parameters are necessary for the establishment of the requested connection. In this way, data transmissions can be reduced and the set up of connections can be accelerated.

[0029] In an advantageous visitor location register, a unit performs a decision whether parameters from the subscriber data record are requested with the location update message and the visitor location register sets an indicator in the message according to the decision. In this way, the VLR can select to perform a location update as known in the state of the art or a location update as proposed in the above method.

[0030] Home location registers as used in the state of the art always transmit a set of parameters from the record in a message in reply to the location update message. Preferably, a visitor location register can discard parameters from the subscriber record which are sent by the home location register in reply to a location up-

date message. In this way, the processing load for parameters received without request is reduced. Preferably, a unit in the VLR performs a decision whether parameters received in reply to a location update message are stored.

[0031] The decisions to request and/or discard parameters can be performed according to the processing load or traffic profile of the visitor location register or both. The processing load is usually monitored by a unit in the VLR for load control, maintenance and statistics purposes. Therefore, the monitored value can be transferred to the deciding unit as basis for the decision which is which is preferably performed periodically. For example, the parameters are discarded if the processing load is above a defined threshold and parameters are requested if the processing load is below the same or a different threshold. The result of the decision to request parameters can be stored and used in the decision to discard parameters.

[0032] To avoid an unnecessary retransmission of parameters and reduce the signaling traffic in the communication system, a preferable visitor location register confirms the reception of discarded parameters to the home location register.

[0033] A home location register for a mobile communication system holds data records assigned to users wherein the records comprise parameters used by the system for the establishment of connections with the respective user and an identification of the visitor location register presently serving him. The HLR has an interface over which parameters from the record can be copied to the serving VLR and location update messages can be received from visitor location registers. A preferable home location register checks whether location update messages comprise an indicator whether parameters from the record are requested and returns parameters in a reply to the location update message if the indicator indicates that parameters are requested. In this way, unnecessary parameter transmissions and their processing by a VLR is avoided.

[0034] It is proposed that the home location register stores, e.g. in a boolean parameter of the data record, whether the serving visitor location register was provided with parameters from the data record during or after the last location update. When a user terminating connection is requested, the HLR sends a message to the serving VLR to request a roaming number for the subscriber. If parameters were not sent before, they can be included in the message to provide the roaming number. Therefore, the parameters are present in the VLR when the request for the establishment of a connection to the provided roaming number is received at the corresponding node and delays in the set up of the connection are avoided.

[0035] A program unit stored on a data carrier or loadable into a visitor location register for a mobile communication system is generally part of the software for operating the VLR. The program unit checks whether the

establishment of a connection with the user is requested and initiates the transfer of parameters from the corresponding data record in the home location register to the visitor location register upon the request. The transfer can be initiated by a message or by setting a corresponding indicator in a message to the HLR. Preferably, the unit checks whether the parameters are already present in the VLR and initiates the transfer only if this is not the case.

[0036] A preferable program unit stored on a data carrier or loadable into a home location register for a mobile communication system is part of the software for operating the HLR. The program unit checks location update messages for an indicator whether parameters from the record are requested. The unit initiates the return of parameters in a reply to the location update message according to the indicator.

[0037] The program units can perform any steps of the above described methods which relate to the respective location register.

[0038] The foregoing and other objects, features and advantages of the present invention will become more apparent in the following detailed description of preferred embodiments as illustrated in the accompanying drawings.

#### Brief description of the drawings

##### [0039]

- Fig. 1 shows a representation of a network in which a method according to the invention is performed
- Fig. 2 shows a location update procedure according to the invention which is executed in a VLR,
- Fig. 3 shows the processing of a mobile originating connection,
- Fig. 4 shows the processing of a mobile terminating connection,
- Fig. 4a shows a supplement to the processing depicted in fig. 4.

#### Detailed description of the invention

[0040] In figure 1, a communication system is depicted in which the method according to the invention is performed. The communication system comprises interconnected control nodes SN, e.g. mobile switching centers MSC according to GSM or UMTS specifications. The interconnected control nodes SN are often denoted as the core network of the communication system. User equipment UE, e.g. mobile phones or other mobile terminals, can be connected to the communication system over base station subsystems BS1, BS2 which serve different partial areas A1, A2 of the area covered by the communication system. A base station subsystem BS comprises one or more base stations for the wireless

connection CO to the user equipment and at least one control node, e.g. a base station controller (BSC), for controlling the base stations and connecting them to a control node SN. Instead of or in addition to GSM base station subsystems BS, any other access network can provide the access of the user equipment UE to the control nodes SN, for example UMTS access networks with radio network controllers (RNC) or wireless local area networks (WLAN). Generally, the communication system is connected to further networks FN which can have a different operator or be located in a different country. As indicated by the incomplete connections, the system can comprise a plurality of further nodes.

[0041] User equipment UE can move through the coverage area of the communication system, for example between areas A1, A2 served by different base station subsystems BS1, BS2 as indicated by the arrow in figure 1. To allow the establishment of connections to the user equipment UE, a home location register HL is assigned to the user equipment UE. It is possible that a communication system comprises more than one home location register HL or that a home location register is located in a further network FN, e.g. if the user equipment UE is roaming in a foreign country. The home location register HL is provided with an indication of the present position of the user equipment UE which is stored in a corresponding data record. In customary cellular networks, the indication of the position is the identity of a visitor location register VL<sub>s</sub> presently serving the user equipment. It is possible to have separate control nodes SN and visitor location registers VL, e.g. if several control nodes SN share a common visitor location register VL, but preferably a visitor location register VL is collocated or integrated with a control node SN serving the same area or the same users. The advantages of these options depend, however, on the architecture of the communication system and may vary, e.g. if different control nodes SN can serve the same area as in a system with separate nodes for processing and controlling connections, i.e. a system with separate control and user planes, wherein the connections between control nodes SN and access networks can be changed and differ for different users.

[0042] If a first control node SN' receives a request for the establishment of a connection to the user equipment UE, the first control node SN' sends a message to the home location register HL of the user equipment to obtain the present location. In customary networks, the home location register HL sends a message to the serving visitor location register VL<sub>s</sub> which is stored in the record of the user equipment. The message requests a roaming number of the user equipment which is returned by the serving visitor location register VL<sub>s</sub> to the home location register HL and forwarded to the first control node SN' for setting up the connection.

[0043] The user record in the home location register comprises also parameters indicating which connection options are accessible to a user. The parameters can

11

EP 1 134 995 A1

12

be copied from the home location register HL to the visitor location register VL<sub>s</sub> serving the user equipment. In customary communication systems, the parameters are always copied to the serving visitor location register VL<sub>s</sub> when the corresponding entry in the user record is updated. This causes a high processing load both in the home location register and in the visitor location registers and increases the signaling traffic in the network.

[0044] Figure 2 depicts a flow chart of those steps in a preferable method according to the invention which are performed in a visitor location register integrated with a control node. When user equipment UE enters the service area A2 of a visitor location register VL<sub>s</sub>, it sends a location update request 10 to the visitor location register VL<sub>s</sub>. After reception of the request 10, an authentication 12 is performed to ensure that the user equipment is authorized to access the communication system. For this purpose, the home location register or, optionally, the former visitor location register serving the user equipment is contacted to obtain the information necessary to authenticate the user, e.g. authentication multiplets. Preferably, also an equipment identity register (EIR) is contacted during the authentication to check whether user equipment is stolen. Authentication procedures are known in the state of the art and described for example in GSM or UMTS specifications.

[0045] After authentication 12, a decision 14 is performed in the visitor location register whether subscriber data is required. The decision 14 comprises a check whether subscriber data is already present in the memory of the visitor location register, e.g. if user equipment reenters a service area which was recently left. Preferably, the decision is based on the processing load and the traffic profile in the visitor location register. In case of a high load which can be defined by a threshold, it is disadvantageous for certain traffic profiles to request data from the subscriber record because the load would be further increased by the data processing while additional processor load can be acceptable at other times. Additional conditions are possible to decide whether subscriber data is required. According to the result of the decision 14, the parameters in a message 18 for requesting a location update in the home location register HL are selected in selection 16 and the location update message 18 is subsequently sent. In particular, an indicator can be set in the MAP (mobile application part) message "update location" to indicate whether parameters from the subscriber record are requested.

[0046] The response 19 from the home location register is analyzed by the visitor location register after reception. In check 20, preferably the type of the received message is determined which can be a location update confirmation or a message comprising parameters from the subscriber record. Alternatively, the contents of the response 19 are examined in check 20 whether parameters from the subscriber record are included. If the home location register checks the location update message 18 for a corresponding indicator and unless pa-

rameters are requested by the visitor location register, response 19 is preferably a confirmation of the location update as the confirmation in step 28. The location update procedure is ended if the correct reception of the location update message is confirmed in response 19. Else a confirmation is preferably requested and awaited before ending the procedure if no parameters are received.

[0047] Response 19 can also contain parameters from the subscriber record, especially when requested in location update message 18 or when a home location register sends parameters in reply to any location update message without checking the indicator. When parameters are received, the visitor location register performs a further decision 22 whether the parameters are stored or discarded. It is proposed to store an indicator in the visitor location register whether parameters are requested when a location update message is sent. Subscription parameters are preferably only stored in the memory of the visitor location register in step 24 when they were requested with the location update message and are discarded else. In both cases, a confirmation 26 of the successful reception of the parameters in the visitor location register is sent to the home location register and the location update procedure ended after reception 28 of a confirmation of the location update from the HLR. It is conceivable to replace decision 22 by a further decision 14 whether subscriber data is required, especially if different conditions, e.g. different thresholds for a high processor load, are used in both decisions.

[0048] To initiate a user originating connection, a service request 30 is sent from the user equipment to the serving control node SN<sub>s</sub> as shown in figure 3. An analysis 32 of the request is performed as it is known in the state of the art. Analysis 32 includes for example the unpacking of the service request, a check of the capabilities of the mobile equipment for setting up connections with an access network or base station subsystem and it is checked whether the request indicates an emergency call which is processed without authentication. The usual access procedure 34 is performed which comprises e.g. the authentication and a confirmation of the radio contact to the user equipment.

[0049] Then a decision 36 is performed whether the subscriber data necessary for setting up the connection is present in the visitor location register assigned to the control node. Decision 36 can be subdivided into two parts, i.e. a check whether any data is necessary and whether this data is present. If the data is present, the usual set up 38 of the connection is performed. Else the set up is suspended and a message 40 is sent to the home location register to send subscriber data. The message 40 can be a MAP message "Send Parameters" or a message "Update location" with a request to send subscription related parameters. The parameters received in response are stored in the visitor location register in step 42. Finally, the set up 38 of the connec-

13

EP 1 134 995 A1

14

tion is performed.

[0050] Figure 4 shows the set up of a terminating connection to the user equipment by a visitor location register combined with a control node, e.g. an MSCNLR, in a method according to the invention. The procedure is initiated with the reception of a request 60 to set up a connection with the user equipment. Generally, the terminating user is represented in connection request 60 by his roaming number which was attributed to him before and which is obtainable via the home location register of the user. In subsequent analysis 62, the request is analyzed for the parameters which are necessary for the requested service. Then a check 64 is performed whether subscriber data is present in the visitor location register. Preferably, it is also decided in check 64 whether any subscriber data is necessary for the requested service, e.g. when it is a free service or exclusively paid by the originating user of the connection. For such cases, an operator can specify that a connection is always set up to the user equipment and parameters of the terminating user need not be checked whether he is allowed to have the corresponding connection. If subscriber data is missing and, optionally, identified as necessary, the corresponding parameters are requested from the home location register with request 66.

[0051] When the subscription parameters are present at the visitor location register, a check 68 is performed whether the terminating user is subscribed to the requested connection, e.g. telephone call, fax, SMS or a data transmission with a specific set of parameters. If the user is not allowed to have the to the requested service, the connection is terminated in step 70. Else, a customary paging 72 of the user equipment is performed and the connection set up is finished in step 74.

[0052] In many communication systems, e.g. those according to GSM or UMTS specifications, the connection request 60 comprises a roaming number attributed to the user. In this case, the procedure in figure 4 can be preceded by the steps shown in figure 4a. When the home location register of the user is contacted to provide the roaming number, it sends a corresponding request 80, e.g. a MAP message, to the visitor location register. Optionally, the home location register sends subscription parameters with any request 80 for a roaming number to a visitor location register. More preferably, it stores whether parameters are sent, checks before a roaming number request if subscription related parameters were already provided for the specific user to the VLR and includes them in the request 80 if not.

[0053] When the request 80 is received in the visitor location register, it performs a check 82 whether the request 80 comprises subscriber data from the record in the home location register. When data is provided, it is stored in step 84. The visitor location register sends a roaming number for the subscriber to the home location register in step 86. Subsequently, the procedure in figure 4 can be started when a connection request with the provided roaming number is received. This embodiment

has the advantage that the number of messages and the processing time of the connection request is reduced compared to the method depicted in figure 4. Especially, request 66 is not necessary because the data is already present at the visitor location register when the connection request 60 is received. Preferably, however, check 64 is still performed to avoid problems when only some home location registers provide parameters with the roaming number request.

[0054] Figure 5 depicts a location register LR for a communication system, the location register LR comprising a memory MEM, a processing system PS and an interface IO for the input and output of data or messages. The memory MEM stores user related parameters. The processing system PS can access and manage the contents of the memory MEM and processes messages or parameters which are sent or received via the interface IO. Procedures performed in the location register LR are preferably embodied as function units in the processing system. Preferably, the units are implemented as software units which are executed in the processing system PS. Depending on the contents of the memory MEM and the units executed in the processing system PS, the location register can be either a VLR or an HLR.

[0055] The above embodiments admirably achieve the objects of the invention. However, it will be appreciated that departures can be made by those skilled in the art without departing from the scope of the invention which is limited only by the claims.

#### Claims

1. Method for a location update in a mobile communication system with a home location register (HL) and visitor location registers (VL), wherein the visitor location registers (VL) serve different parts of the area covered by the communication system and wherein the home location register (HL) holds a data record assigned to a user, the data record comprising parameters for the establishment of connections with the user and an identification of the visitor location register (VL) presently serving the user, wherein parameters from the record can be copied from the home location register (HL) to the visitor location register (VL) serving the user, the method comprising the following steps:

- detection that a user has entered the area served by a visitor location register (VL),
- sending a location update message (18) which indicates the identity of the visitor location register (VL) to the home location register (HL),
- storing the identity of the visitor location register (VL) in the data record for the user,
- requesting the establishment of a connection with the user,

15

EP 1 134 995 A1

16

- sending parameters from the data record in the home location register (HL) to the serving visitor location register (VL).
- 2. Method according to claim 1, wherein a decision (14) is performed whether parameters from the data record are requested and the location update message (18) comprises an indicator according to the decision (14). 5
- 3. Method according to claim 1 or 2, wherein the visitor location register (VL) discards parameters from the data record which are sent by the home location register (HL) in reply to the location update message (18). 10
- 4. Method according to claim 3, wherein the visitor location register (VL) performs a decision (22) whether parameters sent in reply to the location update message (18) are stored. 15
- 5. Method according to any of the claims 2 to 4, wherein at least one decision (14, 22) is performed according to the processing load and/or the traffic profile in the visitor location register (VL). 20
- 6. Method according to any of the claims 3 to 5, wherein the visitor location register (VL) confirms the reception of discarded parameters to the home location register (HL). 25
- 7. Method according to any preceding claim, wherein parameters from the data record in the home location register (HL) are sent in reply to a message from the visitor location register (VL) to send parameters. 30
- 8. Method according to any of the claims 1 to 6, wherein parameters from the data record in the home location register (HL) are sent in reply to a further location update message. 35
- 9. Method according to any preceding claim, wherein a decision (36) is performed whether parameters from the data record in the home location register (HL) are requested before a connection is established. 40
- 10. Method according to any of the claims 1 to 6, wherein parameters from the data record in the home location register (HL) are sent with a message from the home location register (HL) to provide a roaming number for the subscriber. 45
- 11. Visitor location register for serving an area in a mobile communication system, said visitor location register (VL) having a memory (MEM), an interface (10) to receive messages from user equipment located in the area served, an interface (10) for accessing a home location register (HL) with a data record assigned to the user equipment and a processing system (PS) to detect from received messages that user equipment has entered the area served, to send a location update message (18) to the home location register (HL), the message indicating the detected user equipment and the visitor location register (VL), and to store parameters from the data record for connections between the system and the user equipment in the memory (MEM), characterized in that the processing system (PS) initiates the transmission of parameters from the data record in the home location register (HL) when the establishment of a connection between the system and the user equipment is requested. 50
- 12. Visitor location register according to claim 11, wherein a unit performs a decision (36, 64) whether the transfer of parameters from the data record is initiated when the connection is requested. 55
- 13. Visitor location register according to claim 11 or 12, wherein a unit performs a decision (14) whether parameters from the data record are requested with the location update message (18) and the visitor location register (VL) sets an indicator in the message according to the decision (14).
- 14. Visitor location register according to any of the claims 11 to 13, wherein the visitor location register (VL) discards parameters from the data record which are sent by the home location register (HL) in reply to a location update message (18).
- 15. Visitor location register according to claim 14, wherein a unit performs a decision (22) whether parameters received in reply to a location update message (18) are stored.
- 16. Visitor location register according to any of the claims 13 to 15, wherein at least one decision (14, 22) is performed according to the processing load and/or the traffic profile of the visitor location register (VL).
- 17. Visitor location register according to any of the claims 14 to 16, wherein the visitor location register (VL) confirms the reception of discarded parameters to the home location register (HL).
- 18. Home location register for a mobile communication system with visitor location registers (VL) serving parts of the area covered by the communication system, the home location register (HL) comprising a memory (MEM) for holding at least one data record assigned to a user, the record comprising parameters for the establishment of connections of the

17

EP 1 134 995 A1

18

system with the user and an identification of the visitor location register (VL) presently serving the user, wherein the home location register (HL) is provided with a processing system (PS) and an interface (IO) to copy parameters from the record of a user to the serving visitor location register (VL) and to receive location update messages (18) indicating the identity of the serving visitor location register (VL), **characterized in that** the processing system (PS) checks location update messages (18) for an indicator whether parameters from the record are requested and returns parameters in a reply to the location update message (18) according to the indicator.

es (18) comprise an indicator whether parameters from the record are requested and initiates the return of parameters in a reply to the location update message (18) according to the indicator.


22. Program unit according to claim 20 or 21, wherein the program unit performs at least one step of a method according to any of the claims 1 to 10.

19. Home location register according to claim 18, wherein the home location register (HL) stores whether a visitor location register (VL) is provided with parameters from the data record and includes parameters in a message to the visitor location register (VL) to provide a roaming number for the user if the parameters were not provided before.

20. Program unit on a data carrier or loadable into a visitor location register (VL) for a mobile communication system with a home location register (HL), wherein the visitor location register (VL) serves a part of the area covered by the communication system and wherein the home location register (HL) holds at least one data record assigned to a user, the record comprising parameters for connections with the user and an identification of the visitor location register (VL) presently serving the user, and wherein parameters from the record can be copied to the visitor location register (VL) serving the user, wherein said program unit checks whether the establishment of a connection with the user is requested and initiates the sending of parameters from the data record in the home location register (HL) to the serving visitor location register (VL) upon the request.


21. Program unit on a data carrier or loadable into a home location register (HL) for a mobile communication system with visitor location registers (VL) serving parts of the area covered by the communication system, said home location register (HL) holding at least one data record assigned to a user, the record comprising parameters for connections of the system with the user and an identification of the visitor location register (VL) presently serving the user, wherein parameters from the record can be copied from the home location register (HL) to the serving visitor location register (VL) and location update messages (18) from a visitor location register (VL) indicate the identity of the serving visitor location register (VL), **characterized in that** the program unit checks whether location update messages

EP 1 134 995 A1

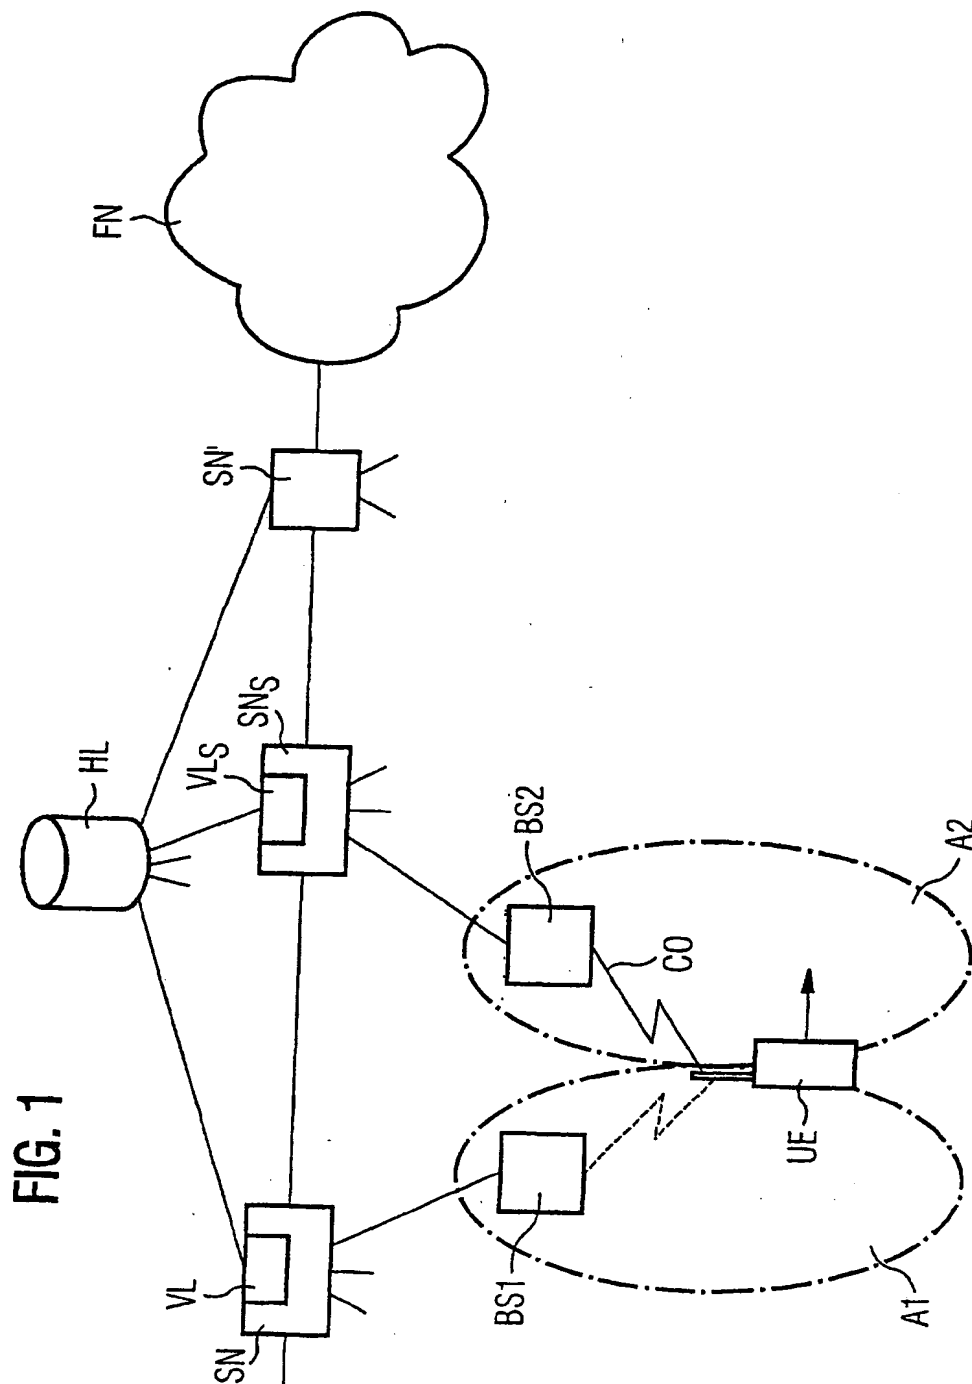


EP 1 134 995 A1

FIG. 2

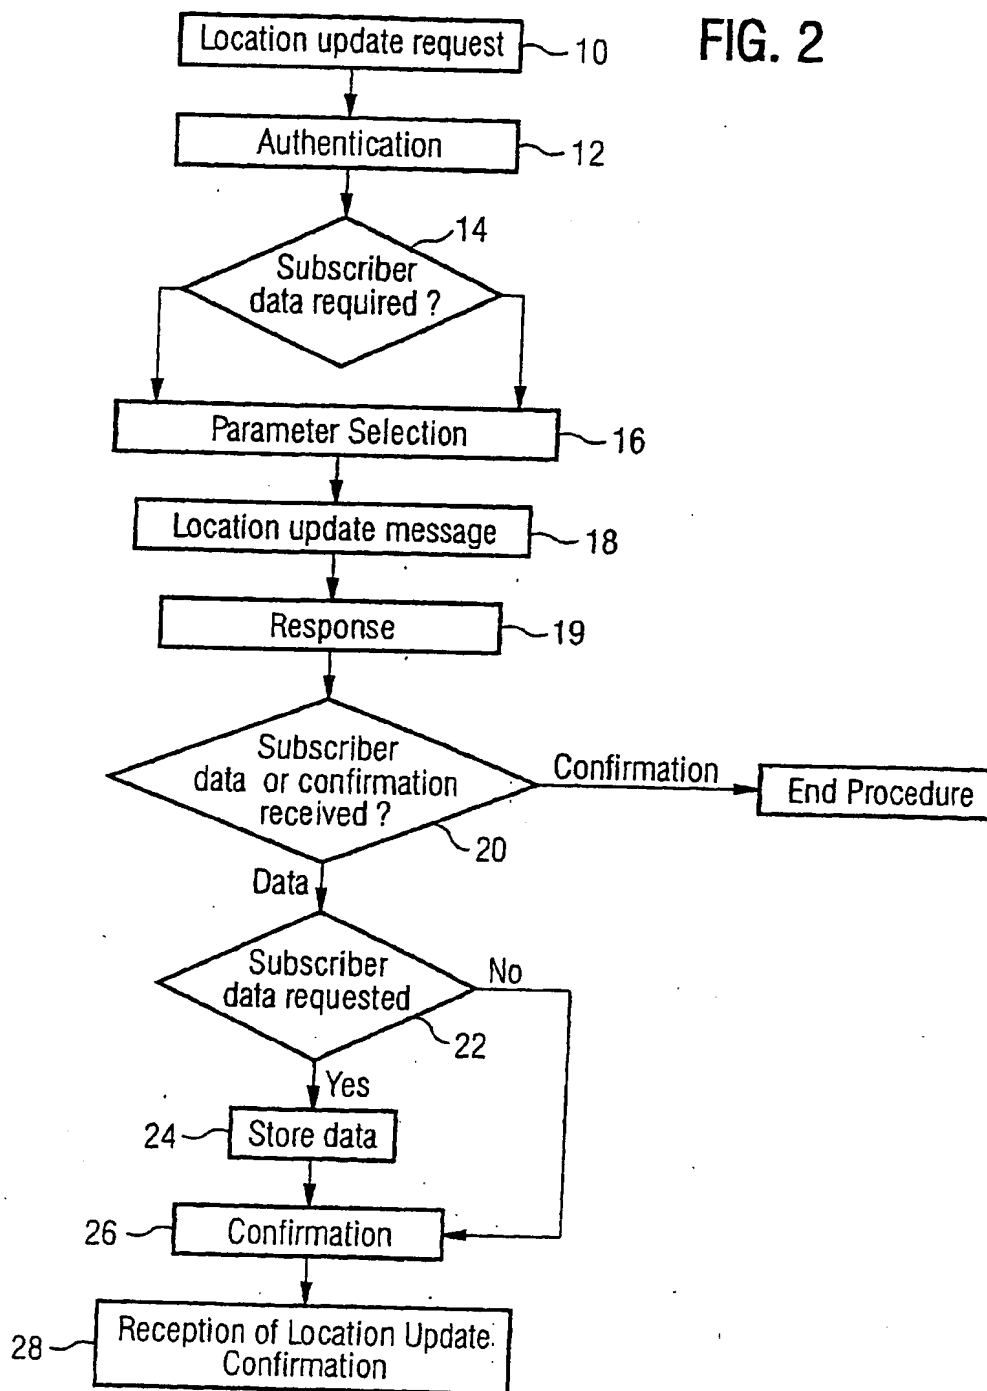


EP 1 134 995 A1

FIG. 3

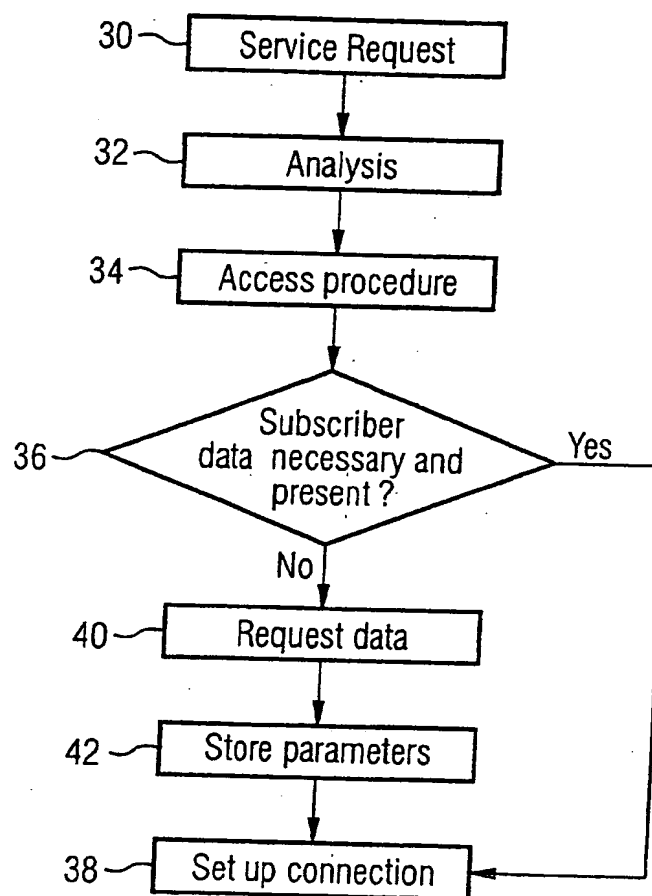

EP 1 134 995 A1

FIG. 4

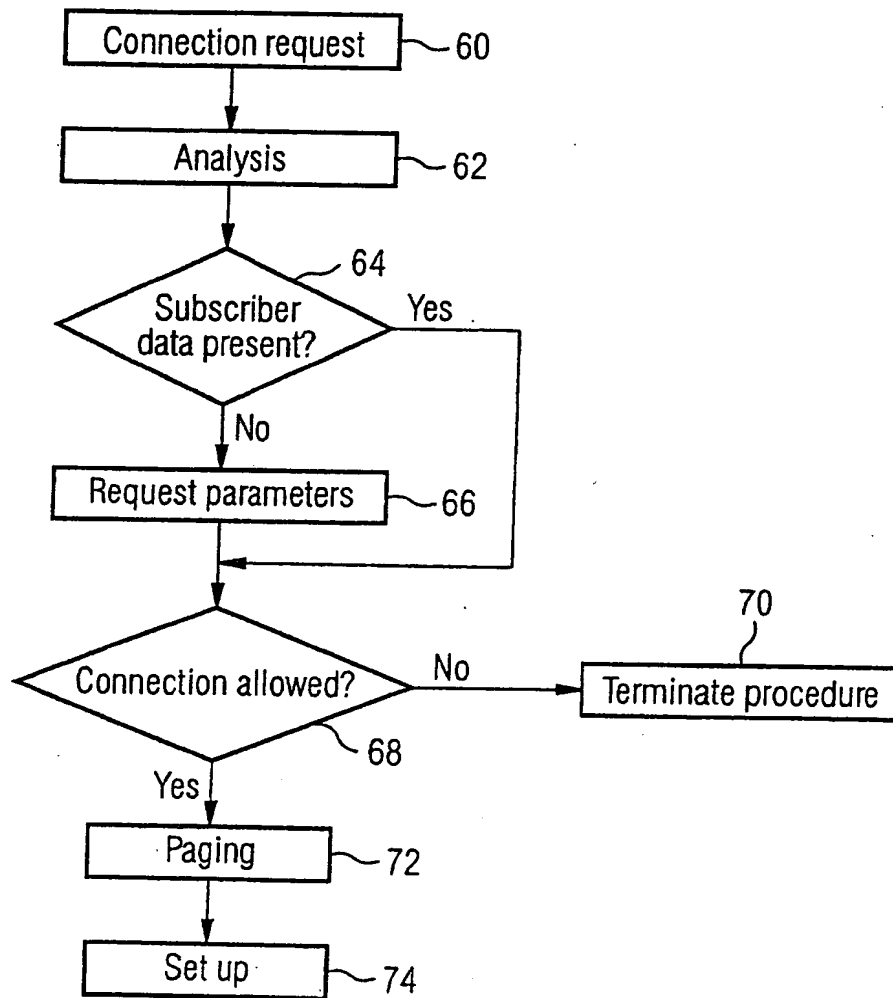

EP 1 134 995 A1

FIG. 4a


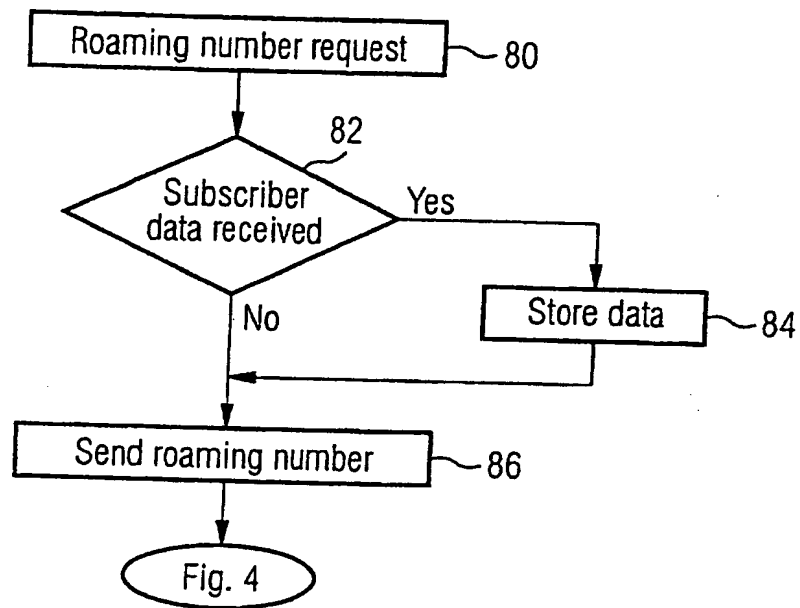


FIG. 5

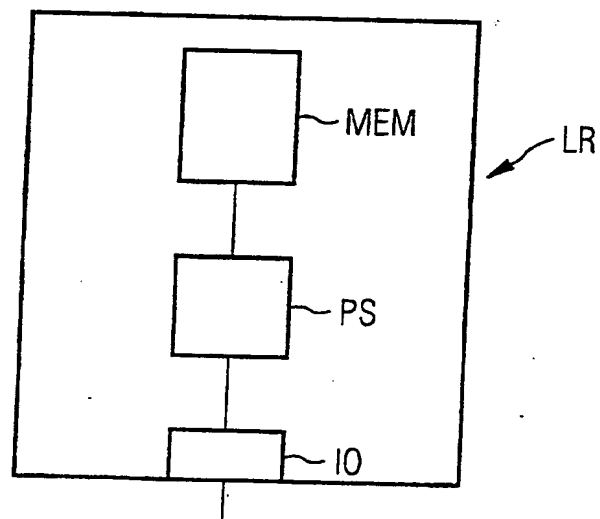

EP 1 134 995 A1

European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 00 10 5747

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	GB 2 328 119 A (IND TECH RES INST) 10 February 1999 (1999-02-10)  * page 8, line 20 - page 9, line 4 * * page 10, line 1 - line 11 * * page 11, line 10 - page 18, line 13 *	1-5, 7-16, 18-22	H0407/38
A	US 5 943 620 A (BOLTZ DAVID ET AL) 24 August 1999 (1999-08-24) * column 3, line 39 - column 4, line 50 *	10,19	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			H04Q
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>10 August 2000</b>	Examiner <b>Pecci, R</b>
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1600 (02/00) (P04001)

EP 1 134 995 A1

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 10 5747

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

10-08-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB 2328119 A	10-02-1999	US 6078811 A	20-06-2000
		CN 1207638 A	10-02-1999
US 5943620 A	24-08-1999	AU 7852398 A	03-07-1998
		BR 9713883 A	29-02-2000
		CN 1245617 A	23-02-2000
		EP 0943214 A	22-09-1999
		WO 9826626 A	18-06-1998

EPO FORM P469

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**